

We provide your solutions

CDF-4S,3S,2S



CDF SERIES



VARIOUS LEVEL SENSORS & CONTROLLERS FOR YOUR APPLICATIONS



가 ()
470-8
: 02-6111-8989 FAX: 02-6111-8187
e-mail : cdi@cdikorea.com
Web : www.cdikorea.com

1104-1106

We provide your solutions

CDF-4S,3S,2S

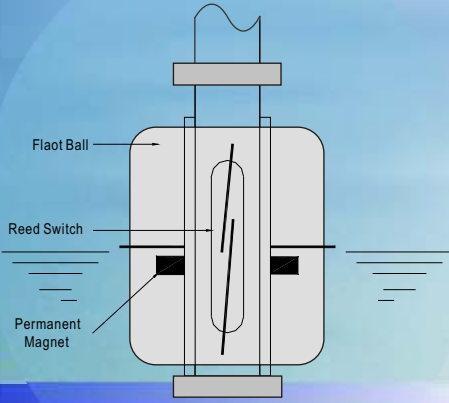


Figure 1

(Permanent magnet)

가

가

가


가

- 가 (SUS304, PP, PVC, PTFE,)
- 2"
- 2
- IP65 가
- 가

가

- 가
-
-
-
-

가

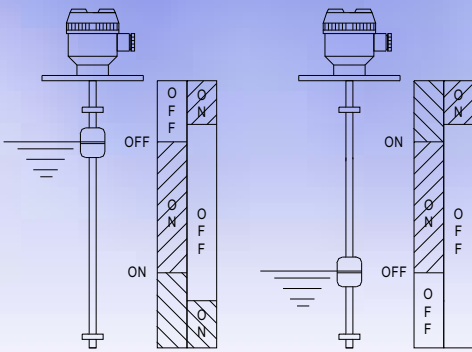

Supply pump & High/Low Alarm


Drain pump & High Alarm

Fluid Materials	Acid	Alkaline	Oil	Solvent
SUS304	X	△	◎	◎
SUS316	△	○	◎	◎
PP	○	○	○	X
PVDF	◎	◎	○	○

Note : ◎ = Excellent , ○ = Good , △ = Acceptable , X = Not good

We provide your solutions


CDF-4S,3S,2S

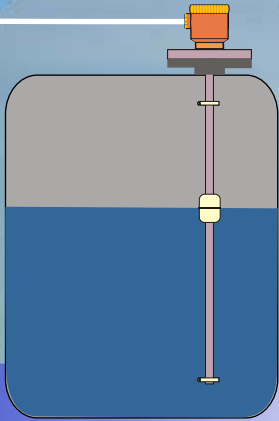

가	0°C to +80°C Max. 10kg/cm ² -10°C to +60°C Max. 6m 60mm 0.4kg/l Max.600 cP
	2" () JIS 10K 80A 6T JIS 10K 100A 6T JIS 10K 125A 6T : RATING
() 가 ()	Polycarbonate Stainless Steel 304 Stainless Steel 304 Stainless Steel 304 Stainless Steel 304 Stainless Steel 304 SUS316, PVC, PP, PTFE
/가	IP65 (NEMA4X) Water-Proof CVVS Thread PF1/2 220V AC, 200V DC DC24V 0.5A/ 1 SPDT

We provide your solutions

CDF-4S,3S,2S

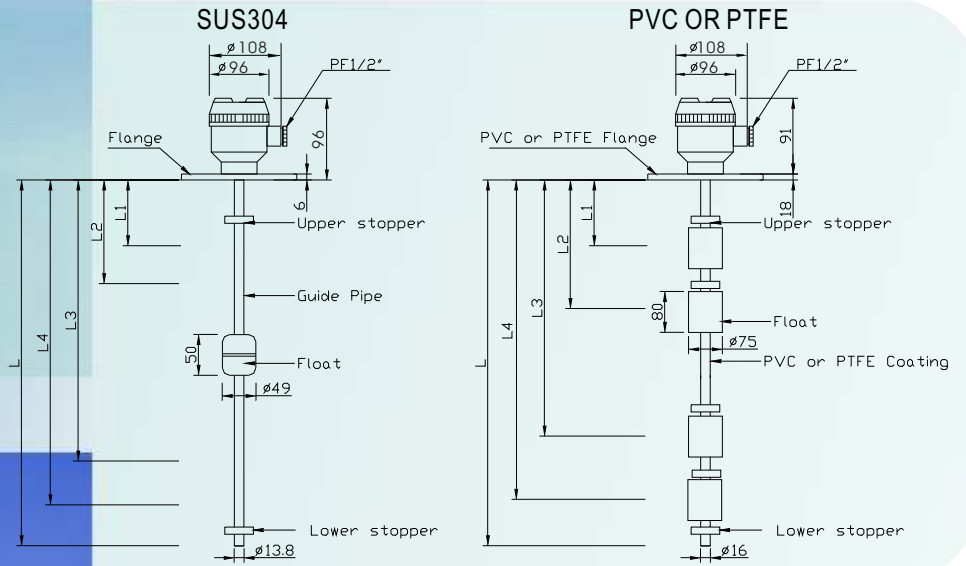

CDF

()	CDF-
2 or 3 or 4 contacts	2S or 3S or 4S
2 or 3 or 4 contacts (2-wire)	2W2S or 2W3S or 2W4S
SUS 304	R4
SUS 316	R6
PVC	P
PTFE	T
()	
JIS 10K 80A (6t)	F3
JIS 10K 100A (6t)	F4
JIS 10K 125A (6t)	F5
2" Screw	S2
	L1-L4 (mm)
가	L (mm)

CDF- 2S-R4-F4- L1(500)-L2(700)-780